



# LABEL APPLICATOR R-3500

ITW  $\beta$  ETAPRINT

- **TOTALLY ELECTRONIC AND DIGITALLY CONTROLLED**
- **SUPERIOR ENGINEERING WITH LARGE LABEL ROLL CAPACITY**
- **LARGE VARIETY OF OPTIONS AND ACCESSORIES**

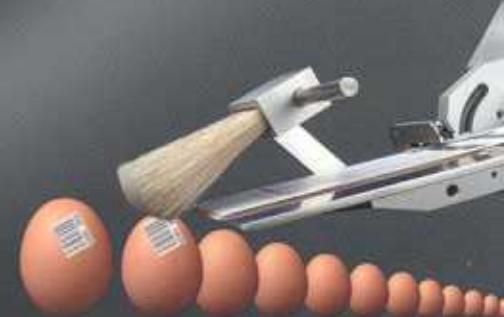

The R-3500 is a pressure sensitive label applicator using the latest generation technology. The system is easy to integrate on conveyors. Many options and accessories are available.

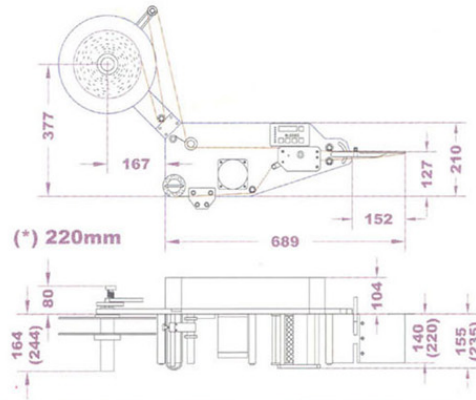

**Technical specifications :**

Application speed.....	25... 50 m/min. (1)
Width of labels.....	120 - 200 mm (*) (1)
Maximum length of labels.....	350 mm (*)
Reel diameter.....	350 mm (*)
Core diameter.....	40 and 75 mm (*)
Interconnection.....	2 input / 6 output

(\*) (Other sizes are available upon request)

**Model specification: R - 3500 - L E M 0 (1)**

L = 1	Left / Right	M = 1	Speed up to 25 m/min.
L = 2	Right / Left	M = 2	Speed up to 50 m/min.
		M = 3	Variable speed with encoder
E = 1	Width 120 mm	M = 4	M - 1 + Pneumatic applicator
E = 2	Width 200 mm	M = 5	M - 2 + Pneumatic applicator


**Accessories:**

- A/B: Pneumatic applicator
- C: Beacon of 1 to 3 colors
- D: Encoder w/bracket ( w/opt. M - 3)
- E/F: Brush applicator
- G: Low label supply detector
- H: Broken label web detector
- K: Bracket for Printer JAGUAR II-52/TP-5100
- L: Bracket for the Thermal printer
- N: Bracket for the printing unit 110 mm TF-1100
- P: Bracket devices


(Other accessories are available upon request.)



Pneumatic label applicator (contact, ejection, etc.)

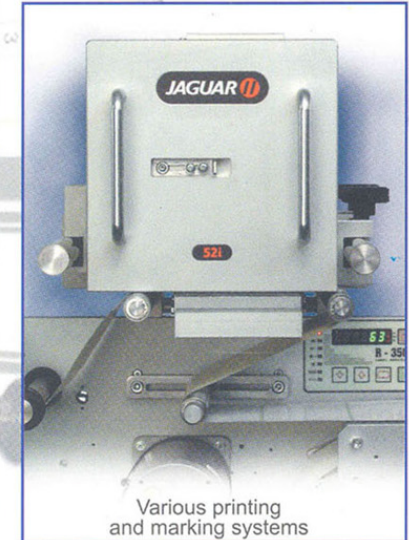

Various printing and marking systems

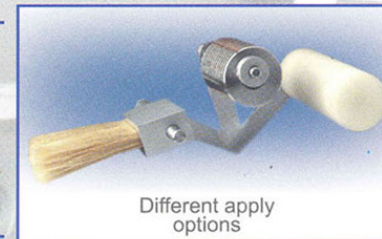

Different apply options



Connections



Standard and custom mounting brackets available

**ITW BETAPRINT**  
 DIVISION DE ITW ESPAÑA, S.A.  
 SISTEMAS DE IMPRESIÓN Y ETIQUETADO

**DISTRIBUTOR:**

C. Pedro Ponce de León, 4  
 Pol. Ind. N.º 1 - 08960 Sant Just Desvern  
 Tf. +34 93 470 56 00 - Fax +34 93 473 56 21  
 e-mail: info@betaprint.com